

TEST REPORT

REPORT NO : 2017PC0178

PAGE NO : 1 OF 2

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This test report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating To The Use of Test Report.

Applicant : RELYON PRODUCTS SDN BHD
56 Jalan 6/2
Bandar Rinching Seksyen 6
43500 Semenyih
Selangor Darul Ehsan

Manufacturer : - same as above -

Product : DRITECH Superlastic S600 (Un-reinforced)

Reference Standard : ASTM D 412: 2006 - Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers – Tension

Description of Sample : One (1) piece of sample indicated above was received on 4 April 2017.


Date Received of Complete Application : 5 April 2017

Job No. : J20171460165


Description of Test Results : The test results of the submitted test sample are described in Page 2 of this test report.

Issued Date : 10 April 2017

Approved Signatory:


(Nomaizura Zakaria)
Testing Executive

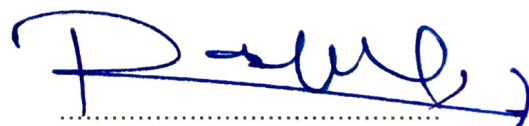


(Rahmad Abd Shukor)
Head
Plastics and Composite Materials Section
Testing Services Department



ONAL

NO : 2017PC0178

PAGE NO : 2 OF 2

This Test Report refers only to samples submitted by the applicant to SIRIM QAS International Sdn. Bhd. and tested by SIRIM QAS International Sdn. Bhd. This test report shall not be reproduced, except in full and shall not be used for any purpose by any means or forms (including but not limited to advertising purposes) without written approval from Managing Director, SIRIM QAS International Sdn. Bhd. Please refer overleaf of Page 1 for Conditions Relating To The Use of Test Report.

Results:

DRITECH Superlastic S600 (Un-reinforced)

NO.	TEST	RESULT	TEST METHOD
1	Tensile Strength, MPa	2.18	ASTM D412
2	Elongation at Break, %	360	Crosshead speed: 500 mm/minute Gauge Length: 33 mm Specimen Type: Die C Date of test: 7 April 2017

